




HOME

4" BLACK AND WHITE VIDEO DOORPHONE



**ARTICO
VIDEO DOORPHONE**



FUNCTION KEYS

Artico by Urmet is an electronic video doorphone with smooth and modern lines that ensure easy and quick installation.

The **Artico** video doorphone features a functional 4" flat screen which can be installed directly resting against the wall without any flush-mounting problems, thanks to its reduced projection.

CHARACTERISTICS

The Artico mod.1705/1 video doorphone features an electronic type call generated by an additional speaker located under the handset. It can be used on all systems with electronic call together with the Atlantico video doorphone and doorphone Mod. 1132 and 1133.

Thanks to a potentiometer, the call volume can be adjusted (mute - low - high).

The mute position prevents the call and is indicated by means of a red mechanical indicator on the lower part of the video doorphone.

Besides opening the electric lock by means of the key (Ⓚ), it is also possible to control additional services (stair lights, additional electric lock opening) using the 2 buttons (◊ and ○) on the video doorphone itself.

Artico has a 4" flat B/W screen with contrast (⦿) and light (⚙) adjustment by means of the 2 potentiometers located in the lower section.

Artico is supplied without wall retention bracket.

Various brackets exist, for connecting the video doorphone to analogue systems with or without coaxial cable and to digital V.O.P. Digivoice and 2GO! systems.

The switch on the rear of the video doorphone permits switching video doorphone operation from analogue mode to digital mode (V.O.P. and Digivoice).

The dimensions of the video doorphone are 241 x 200 x 83 mm. Installation requires no flush-mount box.

By adding a buzzer 9854/52 to the bracket, it is possible to achieve differentiated floor call.


With Artico, the Sentry Mod. 1704 video doorphone can be replaced using only the plastic support of the Artico bracket Sch. 1705/100 onto which the electronic circuit of the Sentry bracket already used in the system will be fitted.

ARTICO.
Electronic video doorphone.
Just how simple can things get?

urmet

ARTICO - Electronic video doorphone

DIMENSIONS

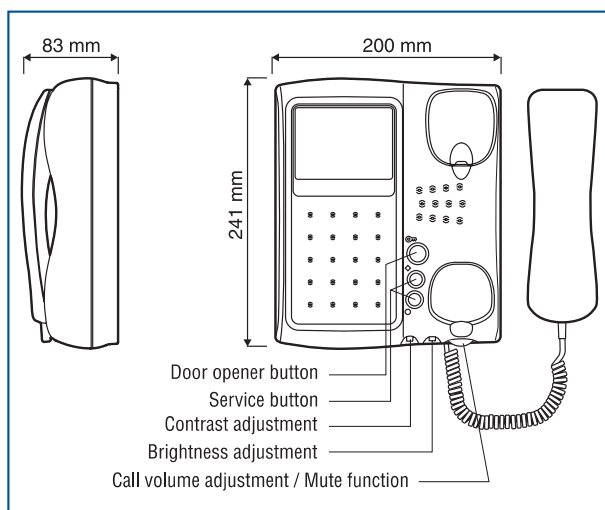

ADJUSTMENTS



Note: installation does not require a flush-mount box.

TECHNICAL SPECIFICATIONS

| | | |
|----------------------------|----------------------------|----------------|
| Power voltage: | 16 ÷ 18,5 Vdc | |
| Consumption: | Working: | max. 0,6 A |
| | Stand-by (coax): | 0 A |
| | Stand-by (5 wires): | 5 mA |
| Working power: | max. 10 W | |
| CCIR version: | Vertical Freq.: | 50 Hz ± 2 Hz |
| | Horizontal Freq.: | 15625 ± 300 Hz |
| Video signal: | 1 Vpp 75 Ω nominal | |
| | 1 Vpp -6 dB minimum | |
| Kinescope: | 4" flat type | |
| Phosphorous: | P45 | |
| Screen size: | 81 x 59 mm | |
| Geometric distortion: | Vertical: | 5% max. |
| | Horizontal: | 5% max. |
| | Barrel: | 10% max. |
| Brightness: | ≥100cd/m2 with max setting | |
| Switch-on delay: | 7 sec. max. | |
| Transmitting capsule: | electret microphone | |
| Receiving capsule: | 45Ω speaker | |
| Button voltage: | 24 Veff. max. | |
| Button current: | 1,2 Aeff. | |
| Working temperature range: | -5° ÷ +50° C | |
| Max humidity: | 90% RH | |

DEVICES AND ACCESSORIES

Ref. 1705/1 Artico monitor with door lock opening key and 2 service keys
Container in white ABS dimensions (WxHxD): 241 x 200 x 83 mm.

ACCESSORIES

Ref. 1705/82 2GO! bracket
Ref. 1705/90 Bracket for systems with coaxial cable
Ref. 1705/92 Digivoice bracket
Ref. 1705/701 2GO! bracket kit with distributor
Ref. 1705/954 Bracket for V.O.P. digital systems
Ref. 1705/955 Bracket for 5-wire systems without coaxial cable
Ref. 1705/100 Plastic support for replacing Sentry video doorphone
Ref. 1132/54 Three-tone gong kit for Atlantico monitor
Ref. 9854/52 Additional electronic buzzer
Ref. 9854/53 Additional device for call from floor
Module to be fitted in bracket. Two-tone call

SPARE PARTS

Ref. 1705/101 Handset for Artico video doorphone

Urmet Domus S.p.A. reserves the right to change the features of the illustrated products. This publication is not contractually binding.



1st edition May 2005



URMET DOMUS S.p.A.
Via Bologna, 188/C 10154 Torino
Tel. +39-011-2400000
Fax +39-011-2400300
info@urmetdomus.it • www.urmetdomus.com

urmet